


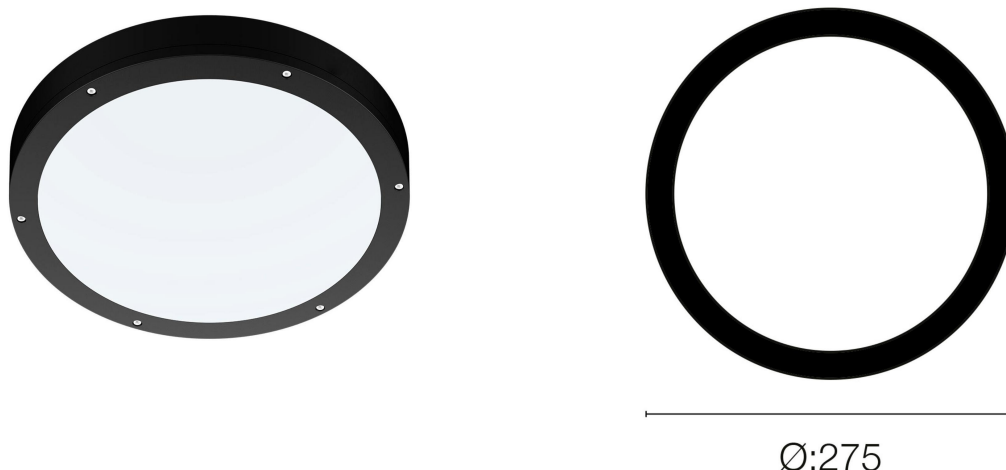

SLC Dio Black 1760/1900/1890 lm 2700/3200/4000K Ra>80 Not dimmable IP65

Outdoor luminaire for wall or ceiling. Easy installation. Has through wiring for both concealed and open installation. Robust luminaire with IK10 and IP65.

Electrical

Input	220-240V 50/60Hz
Rated power	18 W
Control type	Not dimmable
Expected lifetime (25°C)	100 000 hours
Light reduction (25°C)	L90B50
Expected lifetime at max Ta	50.000
Light reduction at max Ta	L90B50
Operating temperature (Ta)	-20°C ~ +45°C
Insulation class	Class II

Light technic

Lumen	1760/1900/1890 lm
Efficacy	112 lm/W
Colour temperature	2700/3200/4000K
Colour rendering (CRI/Ra)	Ra>80
MacAdam (SDCM)	3
Optics	Opal

Mechanical

Installation	Utenpåliggende, Surface
Material, main	Plastic
Material, optics	Polycarbonate
IP class	IP65
IK grade	IK10
Color	Black
RAL	RAL9005
UV resistant	Yes
Suitable for	Indoor / Outdoor

Dimensions

Height	59 mm
Width	275 mm
Length	275 mm
Diameter	275 mm

04.03.2025 | Subject to changes and printing errors.