


Without location flange

Product information for the product group

ACO Product benefits

- Direct installation in the floor slab
- Simple installation by means of integrated grating frame
- Robust design
- Suitable for sealing by means of floor covering
- Resistant to oils, petrols and diesel

- Floor and basement gullies tested to DIN EN 1253-1
- Painted cast iron (transport protection)
- Building material class A1
- With foul air trap
- For connection to SML-pipe tested to DIN 19522/DIN EN 877

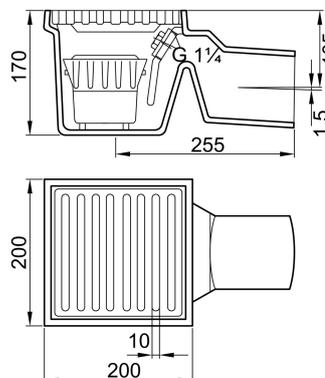

Item Technical Data 5001.00.00

| Material | Nominal width | Class | Flange design | Socket inclination | Recess [mm] | Description | Weight [kg] |
|-------------------|---------------|-------|-------------------------|--------------------|----------------|--|----------------|
| Painted cast iron | DN 100 | L 15 | Without location flange | 1,5° | 250 x 550 | <ul style="list-style-type: none"> ■ Basement gully ■ Painted slot grating ■ With silt bucket □ Black □ Made from hard PE ■ Flow rate: 2 l/s | 11.0 |