


Without location flange

Product information for the product group

ACO Product benefits

- Direct installation in the floor slab
- Simple installation by means of integrated grating frame
- Robust design
- Suitable for sealing by means of floor covering
- Resistant to oils, petrols and diesel

- Floor and basement gullies tested to DIN EN 1253-1
- Painted cast iron (transport protection)
- Building material class A1
- With foul air trap
- For connection to SML-pipe tested to DIN 19522/DIN EN 877

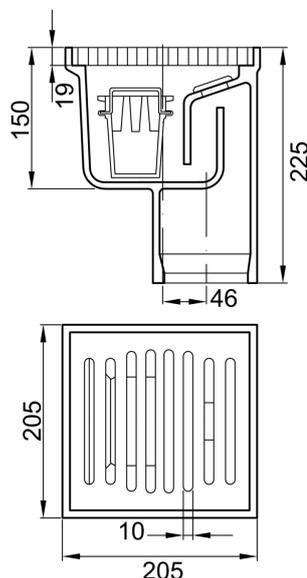

Item Technical Data 5009.40.00

Material	Nominal width	Class	Flange design	Socket inclination	Recess [mm]	Description	Weight [kg]
Painted cast iron	DN 100	L 15	Without location flange	90°	250 x 250	<ul style="list-style-type: none"> ■ Basement gully ■ Painted slot grating ■ With silt bucket □ Black □ Made from hard PE ■ Flow rate: 2 l/s 	13.5