

FREEFLOW below ground hydrant

PN 16



Design features

- Free passage
- Stainless steel plate mechanism with fixed opening and closing points, which will not be affected by encrustation or pollution.
- Good corrosion protection by epoxy coating and non-corroding materials
- Maintenance free
- Automatic drainage system with pressure control, drain time less than 10 min.
- Minimal torque for operation
- Suitable for installation by under pressure drilling (installation afterwards)
- Multiple functions possible
- Seals in shut-off element is protected against damage

Material | Technical features

Standard: EN 14339

Max. operating pressure: 16 bar

Standard pipe cover: 1,50 m

Rate of flow: Rate of flow Q (m³/h) at a differential pressure of 1 bar is higher than demanded by EN 14339
K_v[m³/h]

Remaining water content: < EN 1074-6

- Flange sized and drilled according to EN 1092-2 | PN 16

Connection possibilities:

- Flange connection: EN piece, F piece, drilling clamp flange sized and drilled according to EN 1092-2
- BAIO spigot connection: B piece, MMB piece, SM piece, MMN piece

On request:

- Below ground extensions 100 to 500 mm
- Protection against dirt and twisting no. NL92 of the BAIO spigot

No. 5060

No. 5061

Bayonet coupling
DN 80



Order No.	Version	MOP (PN)	Pipe cover*		
			1,00 m	1,25 m	1,50 m
5060	Flange connection DN 80	16			
5061	BAIO spigot connection DN 80				

*Optional intermediate lengths possible (smallest pipe cover 0,85 m)
Overlengths up to 3 m on request

Application example



Suitable accessories

Suitable accessories: see page H 1/2

Hawle drainage pipe No. 5067
Flanged duck foot bend No. 5045, No. 5046, No. 5049, No. 7981
Operating key No. 3460, No. 3461
Flat gasket No. 3390
Bolts No. 8810, No. 8830, No. 8840
Surface boxes No. 1950, No 1950K
Dirt and anti-twist protection No. NL92




E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com

H 5/1

FREEFLOW below ground hydrant

PN 16

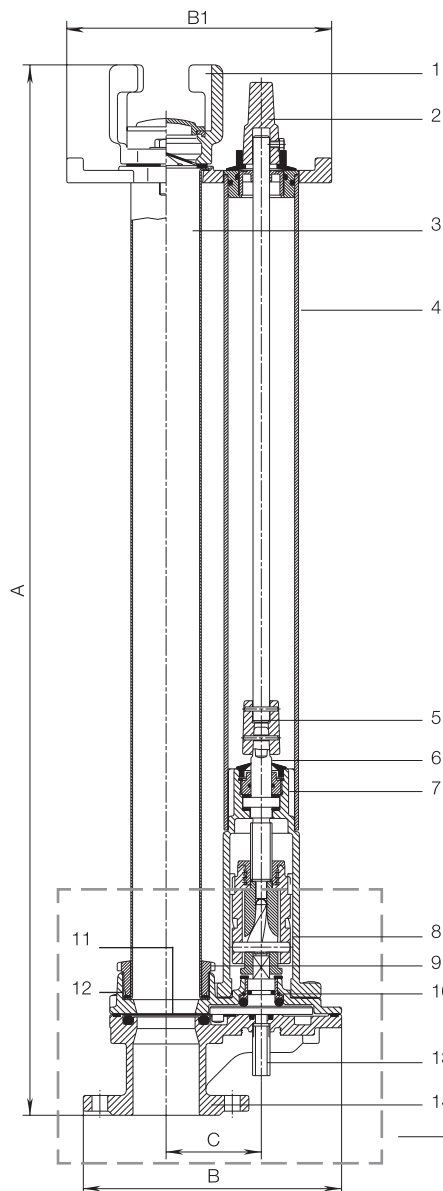

Recommendation:
drainage water
absorber no. 5062




	Parts	Material
1	Bayonet coupling	ductile iron
2	Operating nut	ductile iron, galvanised
3	Pipe	stainless steel, epoxy powder-coated
4	Plastic protection pipe	PP
5	Spindle sleeve	ductile iron, galvanised
6	Spindle	stainless steel
7	Gear	ductile iron
8	Plate drive	stainless steel
9	Ring nut	PA
10	Diving worm	brass
11	Valve plate	stainless steel
12	Hydrant top	ductile iron
13	Drain connection	PE
14	Hydrant end with flange connector or BAIO spigot connector	ductile iron


Order No.	Connection	Pipe cover	A	B	B1	C	Weight
5060	Flange DN 80	1,00 m	740	280	320	115	35,0
		1,25 m	990				37,5
		1,50 m	1240				39,5
5061	BAIO spigot DN 80	1,00 m	785	280	320	115	31,5
		1,25 m	1045				34,0
		1,50 m	1295				36,0

Other application opportunities


Under pressure drilling

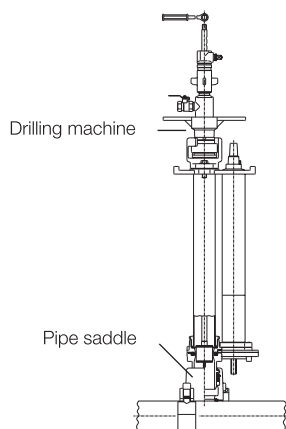


Pipe inspection

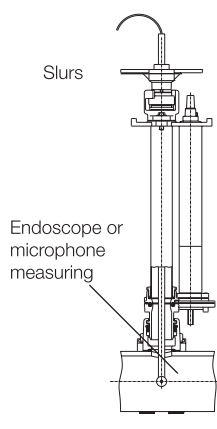

Pipe cleaning via badger

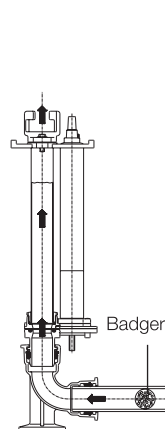

Pipe draining with sucking lance

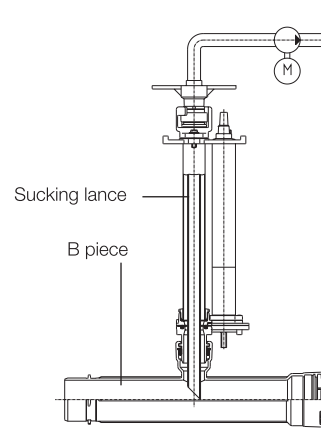

H 5/2



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com