




LED panel with micro-prismatic cover

MODUS US4000, LED 830, recessed, rectangle C, modul 600, driver 1050mA DALI

Code: US4000C3KN600/DALI

EAN: 8596099018443

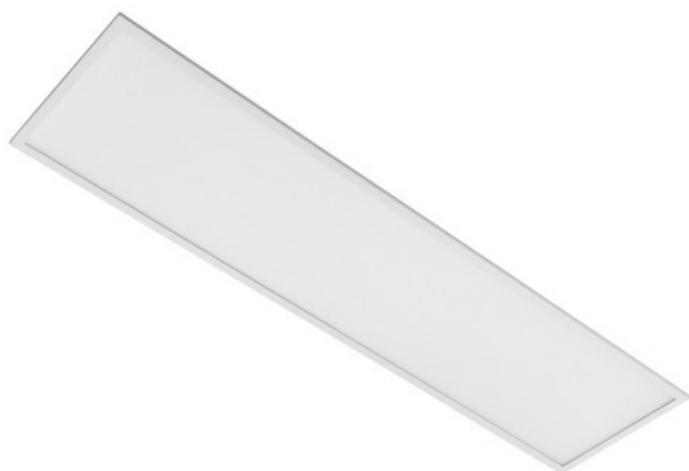

Vlastnosti svítidla

Product category:	Ceiling / wall luminaires	Degree of protection (IP):	IP40
Color housing:	White	Material housing:	Steel
Suitable for built-in mounting:	Yes		

Světelný zdroj

Lamp type:	LED not exchangeable	Effective luminous flux (lm):	3900
System power (W):	36	Luminaire efficacy (lm/W):	108
Color temperature (K):	3000	Color rendering index CRI:	80-89
Rated life time L80/B50 (h):	50000	With lamp:	Yes
Colour of light:	White		

Optický systém

Optical system:	KN	Light outlet:	Direct
Anti-glare limiting UGR:	19	Light sharing:	Symmetric
Material cover:	Plastic, structured	Radiation angle:	Extreme wide beam >80°

Rozměry

Length (mm):	1196	Width (mm):	296
Height/depth (mm):	15	Built-in height/depth (mm):	15
Raster (mm):	600	Size version:	M
Weight (kg):	4		

Elektrické vlastnosti

Protection class:	II	Type of control gear:	LED operating device current-controlled
Nominal voltage (V):	220...240	Control gear included:	Yes
Dimming DALI:	Yes		