

# ISO PIPE FITTING

## Elbow



### Design feature

- With internal thread according to ISO 228

| Order No. | Ø Pipe | Thread | MOP (PN) | L   | E   | Ø D | Weight |
|-----------|--------|--------|----------|-----|-----|-----|--------|
| 6410      | 25     | ¾"     | 16       | 71  | 58  | 44  | 0,38   |
|           | 32     | 1"     |          | 87  | 70  | 53  | 0,70   |
|           | 40     | 1¼"    |          | 106 | 84  | 65  | 1,17   |
|           | 50     | 1½"    |          | 141 | 101 | 76  | 1,50   |
|           | 63     | 2"     |          | 163 | 114 | 94  | 2,75   |

| Order No. | Ø Pipe | Thread | MOP (PN) | L   | E   | Ø D | Weight |
|-----------|--------|--------|----------|-----|-----|-----|--------|
| 6430      | 20     | ½"     | 16       | 60  | 48  | 39  | 0,07   |
|           | 25     | ¾"     |          | 71  | 58  | 43  | 0,10   |
|           | 32     | 1"     |          | 87  | 70  | 53  | 0,14   |
|           | 40     | 1¼"    |          | 103 | 82  | 72  | 0,28   |
|           | 50     | 1½"    |          | 137 | 99  | 83  | 0,42   |
|           | 63     | 2"     |          | 145 | 110 | 99  | 0,67   |

### Design feature

- With external thread according to EN 10226-1

| Order No. | Ø Pipe | Thread | MOP (PN) | L   | E   | Ø D | Weight |
|-----------|--------|--------|----------|-----|-----|-----|--------|
| 6460      | 25     | ¾"     | 16       | 71  | 58  | 44  | 0,40   |
|           | 32     | 1"     |          | 87  | 70  | 53  | 0,56   |
|           | 40     | 1¼"    |          | 104 | 84  | 65  | 1,10   |
|           | 50     | 1½"    |          | 141 | 101 | 76  | 1,70   |
|           | 63     | 2"     |          | 163 | 114 | 94  | 2,52   |

| Order No. | Ø Pipe | Thread | MOP (PN) | L   | E   | Ø D | Weight |
|-----------|--------|--------|----------|-----|-----|-----|--------|
| 6470      | 25     | 1"     | 16       | 82  | 70  | 44  | 0,57   |
|           | 32     | 1¼"    |          | 90  | 70  | 53  | 0,60   |
|           | 32     | 1½"    |          | 90  | 70  | 53  | 0,90   |
|           | 32     | 2"     |          | 87  | 70  | 53  | 0,69   |
|           | 40     | 1½"    |          | 141 | 101 | 76  | 1,10   |

### Design feature

- With external thread according to EN 10226-1

| Order No. | Ø Pipe | Thread | MOP (PN) | L  | E  | Ø D | Weight |
|-----------|--------|--------|----------|----|----|-----|--------|
| 6411      | 32     | 1"     | 16       | 77 | 70 | 53  | 0,55   |
|           | 32     | 2"     |          | 78 | 70 | 53  | 0,59   |

### Design feature


- With external thread according to EN 10226-1
- ISO socket 360° rotatable

| Order No. | Ø Pipe | Thread | MOP (PN) | L   | E   | Ø D | Weight |
|-----------|--------|--------|----------|-----|-----|-----|--------|
| 6462      | 63     | 1½"    | 16       | 148 | 105 | 93  | 2,65   |

**Elbow 90°** With internal thread

**No. 6410** Made of ductile iron

**No. 6430** Made of POM

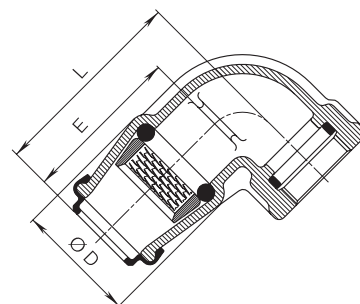


**Elbow 90°** With external thread

**No. 6460** Made of ductile iron


**90° elbow with external thread reduced**

**No. 6470** Made of ductile iron

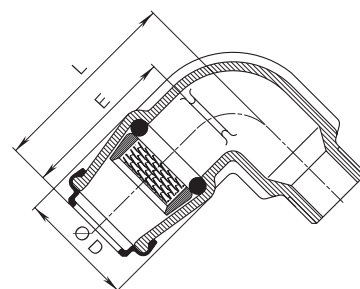


**Elbow 45°** With external thread

**No. 6411** Made of ductile iron



**Elbow 90°** Swivelling fitting, with external thread

**No. 6462** Made of ductile iron



**K 5/2**



**E. Hawle Armaturenwerke GmbH** 4840 Vöcklabruck - Austria - Wagrain Straße 13  
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com