


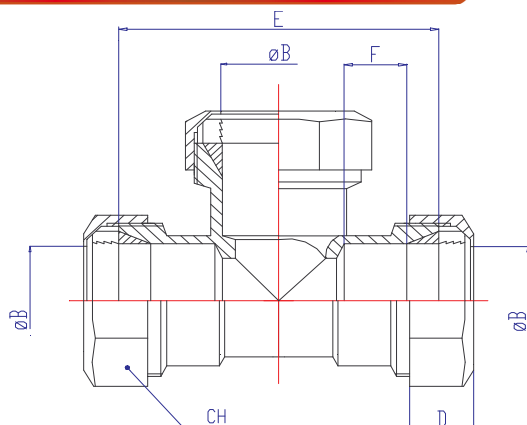

**MATERIALS**

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE  
COMPONENT  
ONLY!!**

**ART. 4307**  
**T fitting for PE pipe**


**QUICK CONNECTION**

| Misura | B  | D    | E   | F  | CH |
|--------|----|------|-----|----|----|
| 20     | 21 | 17   | 62  | 11 | 34 |
| 25     | 26 | 19   | 74  | 11 | 41 |
| 32     | 33 | 22   | 82  | 11 | 51 |
| 40     | 42 | 24   | 102 | 15 | 59 |
| 50     | 52 | 25,6 | 120 | 19 | 70 |
| 63     | 65 | 29,5 | 148 | 21 | 87 |

**TECHNICAL DATA:**

Max Working pressure: **25 bar**  
 Working temperature: **-15° +110°C**  
 Threads: **UNI ISO 228/1**

**For high and low density PE pipes**  
 Tests conforming to:  
**UNI EN 1254-3:2000 (UNI EN 712, 713, 715)**

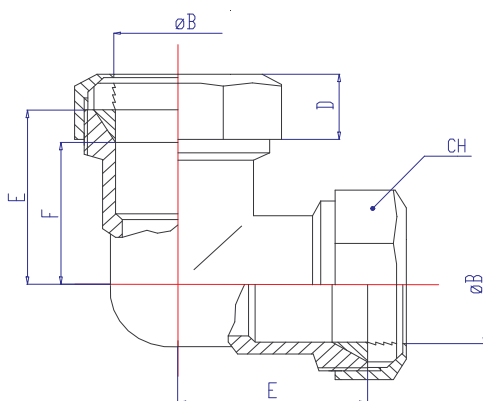

**MATERIALS**

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE  
COMPONENT  
ONLY!!**

**ART. 4308**  
**Elbow 90° for PE pipe**

**QUICK CONNECTION**

| Misura | B  | D    | E  | F  | CH |
|--------|----|------|----|----|----|
| 20     | 21 | 17   | 33 | 13 | 34 |
| 25     | 26 | 19   | 39 | 15 | 41 |
| 32     | 33 | 22   | 45 | 15 | 51 |
| 40     | 42 | 24   | 57 | 22 | 59 |
| 50     | 52 | 25,6 | 67 | 27 | 70 |
| 63     | 65 | 29,5 | 80 | 28 | 87 |

**TECHNICAL DATA:**

Max Working pressure: **25 bar**  
 Working temperature: **-15° +110°C**  
 Threads: **UNI ISO 228/1**

**For high and low density PE pipes**  
 Tests conforming to:  
**UNI EN 1254-3:2000 (UNI EN 712, 713, 715)**