

# ISO PIPE FITTING

## T-piece | Fitting | End stop



Order No.	Ø Pipe 1	Ø Pipe 2	Ø Pipe 3	MOP (PN)	L	E1	E2	E3	Weight	
6551	40	63	40	16	246	88	115	88	1,18	
	63	40	40		272	115	88	88	1,18	
	63	40	63		297	115	88	115	1,23	
	63	63	40		272	115	115	88	1,23	

### Design features

- With external thread according to EN 10226-1
- With external thread for protective sleeve according to EN 10226-1

Order No.	Ø Pipe	Thread 1	Thread 2	MOP (PN)	L	E	ØD	Weight	
6901	32	1"	1½"	16	88	63	53	0,40	
	40	1¼"	2"		104	76	64,5	0,70	
	50	1½"	2½"		120	91	76	1,10	

Order No.	Ø Pipe	MOP (PN)	L	E	ØD	Weight	
6223	20	16	54,5	48,5	39	0,04	
	25		65,5	58,5	43	0,06	
	32		75,0	70,0	53	0,09	
	40		92,5	82,5	72	0,20	
	50		107	101	83	0,28	
	63		117	111	99	0,40	


### Design features

- With one external thread outlet EN 10226-1
- Made of POM
- Every push-fit end can be modified to a external thread outlet

Order No.	DN	Thread	L	Weight	
6630	¾"	¾"	92	0,05	
	1"	1"	105	0,10	
	1¼"	1¼"	123	0,13	
	1½"	1½"	144	0,18	
	2"	2"	160	0,28	
6631	1"	1½"	117	0,07	
	1"	2"	126	0,12	

### T-piece reduced With 3 sockets


No. 6551 Made of POM

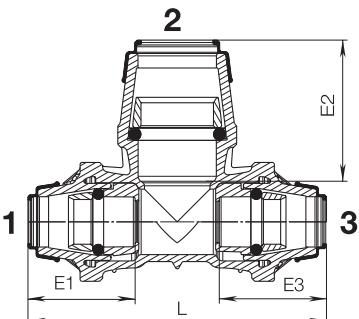

### Fitting


For wall inlet fitting No. 690 (old version)

No. 6901 Made of ductile iron

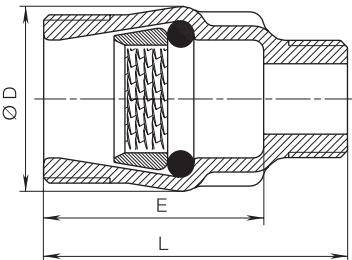

### End stop

No. 6223 Made of POM



### Push fit swivel converter

No. 6630 equal

No. 6631 special dimensions



K 6/2



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainer Straße 13  
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com