MultiFlex Swivel Multi-directional connector

The MultiFlex swivel is an ingenious multi-directional connector. Connect your tool and the hose will stay in the ideal position however much you and the tool move around. The MultiFlex bends and rotates 360° in all directions while the hose stays straight. It takes the effort out of working in those cramped spaces. What's more, the hose feels almost weightless and it reduces hose wear. It's the magic of MultiFlex - a marriage of ergonomic thinking and ingenious design.

- Ergonomic.
- Reduces hose wear.
- · High flow capacity.
- Minimum pressure drop.
- · Strong and durable.
- Cover made of EPDM.




| | Max rec. | | Thread | | | | | |
|----------------------|----------|-----|--------------|-------------|--------|--------|------|--------------|
| | | | Inlet female | Outlet male | Weight | Length | Dia | |
| Model | l/s | cfm | in | in | g | mm | mm | Ordering No. |
| MultiFlex 1/8" BSP | 12 | 25 | 1/8 | 1/8 | 73 | 66.2 | 24 | 8202 1350 18 |
| MultiFlex 1/4" BSP | 12 | 25 | 1/4 | 1/4 | 73 | 66.2 | 24 | 8202 1350 20 |
| MultiFlex 3/8" BSP | 32 | 68 | 3/8 | 3/8 | 130 | 80.6 | 29.5 | 8202 1350 22 |
| MultiFlex 1/2" BSP | 32 | 68 | 1/2 | 1/2 | 125 | 80.6 | 29.5 | 8202 1350 24 |
| MultiFlex 1/8" BSP b | 12 | 25 | 1/8 | 1/8 | 76 | 66.2 | 27 | 8202 1350 40 |
| MultiFlex 1/4" BSP b | 12 | 25 | 1/4 | 1/4 | 76 | 66.2 | 27 | 8202 1350 41 |
| MultiFlex 1/2" BSP ° | 54 | 114 | 1/2 | 1/2 | 326 | 98.3 | 39 | 8202 1350 60 |


^a The pressure drop will be 0.2 bar at an inlet pressure of 6 bar.

Flow chart


MultiFlex 1/2" or 3/8"

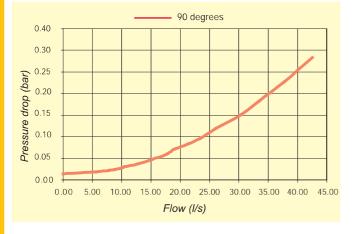

MultiFlex 1/8" or 1/4"



MultiFlex HIGH FLOW



^b With cover.

[°] HIGH FLOW.